


Flow Meters Overview Guide



MODERN PLANT

The Home of
Control & Automation
in Ireland

KATRONIC




10–6,500 mm



Power Generation




Aircraft and
Aerospace



Oil and Gas

Portable
and
Fixed
Installation



Semiconductor



Marine and
Shipbuilding



Petrochemical

+250°C
and higher



Pharmaceutical



-50°C
and lower

±25 m/s
Flow Velocity



Food and Drink



Water and
Wastewater



Building Services

ISO 9001
Certified
Company



Manufacturing
and Process



Providing reliable flow measurements to satisfied customers since 1996

Katronic's excellent reputation has been built on offering accurate and intuitive clamp-on flowmeters supported by market-leading customer service and technical support.



Our Mission Statement

To provide innovative products and services that staff can be proud of and customers can trust.

To foster relationships with customers, suppliers and colleagues that add benefit to all parties.

To offer levels of support and flexibility that exceed those of our competitors.

Katronic

Your Solution Starts With Our Product


THE TECHNOLOGY BEHIND THE MEASUREMENT

The KATflow non-invasive flowmeters work on the transit time ultrasonic principle. This involves sending and receiving ultrasonic pulses from a pair of sensors and examining the time difference in the signal. Katronic uses clamp-on transducers that are mounted externally on the surface of the pipe and which generate pulses that pass through the pipe wall. The flowing liquid within causes time differences in the ultrasonic signals, which are then evaluated by the flowmeter to produce an accurate flow measurement.

The key principle of the method applied is that sound waves travelling with the flow will move faster than those travelling against it. The difference in the transit time of these signals is proportional to

the flow velocity of the liquid and consequently the flow rate.

Since elements such as flow profile, type of liquid and pipe material will have an effect on the measurement, the flowmeter compensates for and adapts to changes in the medium in order to provide reliable results. The instruments can be used in a variety of locations from measurements on submarines, to installations on systems destined for use in space, and on process fluids as different as purified water in the pharmaceutical sector and toxic chemical effluent. The flowmeters will operate on various pipe materials and diameters over a range of 10 mm to 6,500 mm.

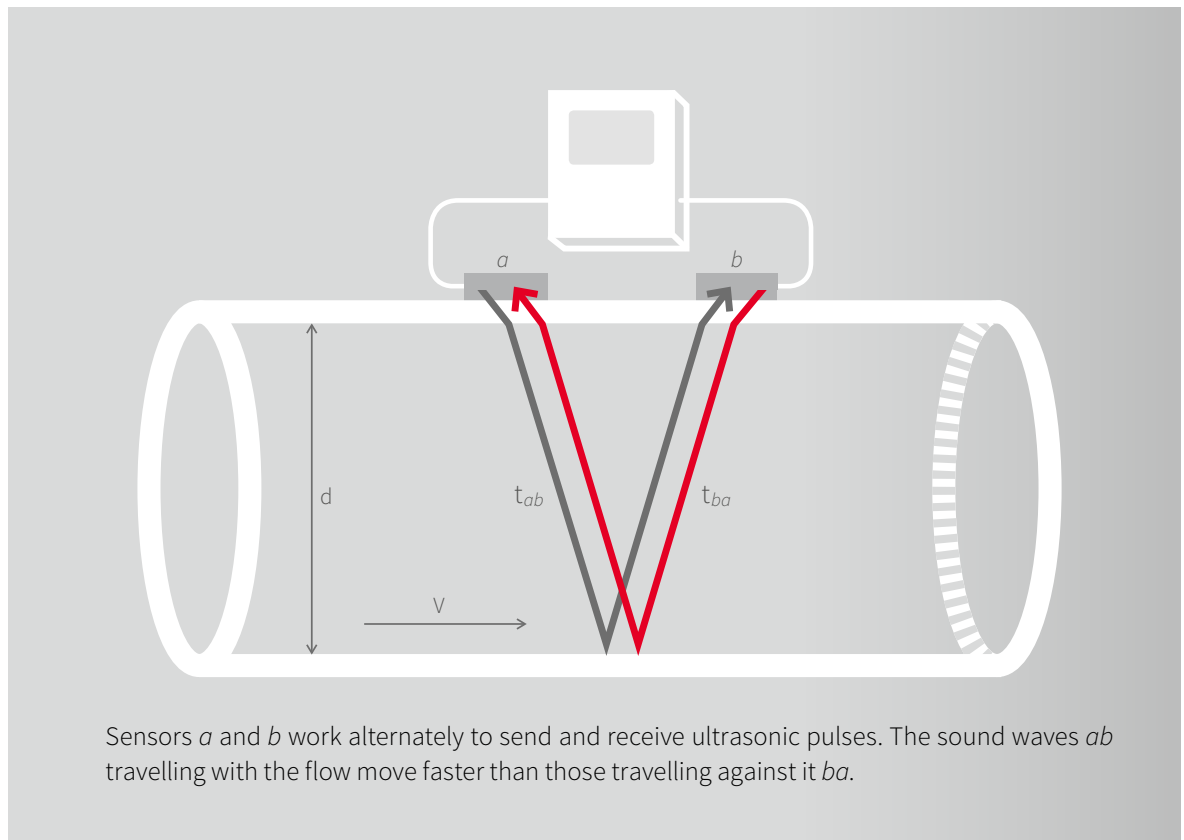

KATflow 200

Hand-Held Clamp-On Ultrasonic Flowmeter



Hand-held design and intuitive menu structure make the KATflow 200 extremely easy to operate. The flowmeter and accessories are neatly arranged in a robust IP 67 transport case.



INNOVATIVE. INTUITIVE. INTELLIGENT.

The KATflow 200 is a fully portable instrument with a power which is belied by its small size. This lightweight flowmeter is incredibly easy to use and can be operated one-handed which makes it an ideal tool for use in confined spaces or when working

at height. The KATflow 200 offers measurement performance normally associated with more complex and expensive devices and is complemented by the exceptional quality and robustness of the Katronic transducers.

Portable -30°C $+250^{\circ}\text{C}$



SPECIFICATION

- Pipe diameter range 10 mm to 6,500 mm
- Temperature range for sensors
-30 °C to +250 °C (-22 °F to +482 °F)
- Weight 650 g
- Robust IP 65 enclosure with added rubber shock protector
- Selectable three-line LCD display and full keypad
- Battery life up to 24 hours with standard NiMH AA batteries for simple replacement

FEATURES

- Lightweight and tactile for easy one-handed use
- Stainless steel sensors, cable and connectors as standard
- Innovative installation wizard for quick and intuitive programming
- Full instrument diagnostics and scope function
- Large data logger and software for sampling and data transfer
- Optional pipe wall thickness gauge

APPLICATIONS

- Pump testing and inspection
- In-line flowmeter performance verification
- Leakage and blockage detection
- Clean in process system (CIP) testing
- Monitoring of hydraulic systems
- Clean room applications




KATflow 230

Portable Clamp-On Ultrasonic Flowmeter



The robust multifunctional KATflow 230 and K1N sensors with durable connector for measurement on larger pipes.



POWERFUL. PRACTICAL. PORTABLE.

The KATflow 230 is easily portable but incorporates an advanced specification for situations which require comprehensive measurement features coupled with easy operation. The flowmeter has two measurement channels, which allow it to

monitor two pipes simultaneously or to improve accuracy in non-ideal conditions. The KATflow 230 can also be supplied with a variety of options to meet the most diverse application requirements.

Portable

-30°C +250°C



SPECIFICATION

- Pipe diameter range 10 mm to 6,500 mm
- Temperature range for sensors
-30 °C to +250 °C (-22 °F to +482 °F)
- Robust IP 65 aluminium enclosure
- Selectable three-line LCD display and full keypad
- Battery life up to 24 hours with easily replaceable battery cartridge
- Measurement of two flows simultaneously

FEATURES

- Dual flow monitoring with *sum*, *average*, *difference* and *maximum* calculations
- PT100 inputs for heat quantity (thermal energy) measurement
- Process output options including current, open-collector, relay
- Large data logger and software for sampling and data transfer
- Stainless steel sensors, cable and connectors as standard
- Optional pipe wall thickness gauge

APPLICATIONS

- Heating, Ventilation and Air Conditioning (HVAC) measurements
- Large pipe measurement with two sensor pairs in 'X' configuration
- Temporary replacement of conventional in-line flowmeters
- Building surveys on large facilities
- Efficiency monitoring of heat exchangers
- Clean in process system (CIP) testing




KATflow 100

Standard Clamp-On Ultrasonic Flow Transmitter



The KATflow 100 and K1L transducers for installation on standard process applications with pipes greater than 50 mm.

SMALL. SIMPLE. STURDY.




The KATflow 100 is a compact clamp-on ultrasonic flow transmitter with a robust and practical design for permanent installation and flow measurement on single pipes. The instrument offers a cost-effective option owing to its simplified specification and

the availability of a range of transducer types. The varied functionality and simple operation of the KATflow 100 make it the perfect product for large projects and customer specific solutions.

Fixed
Installation

-30°C +80°C



SPECIFICATION

- Pipe diameter range 10 mm to 3,000 mm
- Temperature range for sensors
-30 °C to +80 °C (-22 °F to +176 °F)
- Weight 750 g
- Robust IP 66 aluminium enclosure
- Sturdy unit with LCD display and five-key keypad
- Wall or pipe mounted

FEATURES

- Low cost of ownership
- Process outputs including RS 485,
Modbus RTU and HART* compatible output
- PT100 inputs for heat quantity (thermal energy)
measurement
- Bi-directional measurement with
totaliser function
- Innovative installation wizard for quick
and intuitive programming
- Configuration can be changed to suit
customer requirements

APPLICATIONS

- Water and wastewater measurements
- Replacement of electromagnetic flowmeters
- Monitoring and controlling of HVAC systems
- Cost-effective solution for large scale projects
- Automated process control
- Shipping applications

* HART® is a registered trademark of the
HART Communication Foundation




KATflow 150

Advanced Clamp-On Ultrasonic Flowmeter



The wall mounted KATflow 150 offers practical and simple operation with its attractive housing, lockable polycarbonate cover and stainless steel transducers.

FAST. FLEXIBLE. FUNCTIONAL.





The KATflow 150 is the premier product for flexibility and performance, providing the user with a comprehensive specification and a list of configuration options. The practical modular design and the wide variety of different transducer types available

ensure this instrument is suitable for everything from simple water flow measurements to energy flow monitoring, automated process control and product recognition applications.

Fixed
Installation

-30°C +250°C



SPECIFICATION

- Pipe diameter range 10 mm to 6,500 mm
- Temperature range for sensors
-30 °C to +250 °C (-22 °F to +482 °F), higher
temperatures available on request
- Lockable and sturdy IP 66 polycarbonate
flowmeter enclosure
- Selectable three-line LCD display and full keypad
- Up to ten different input or output slots available
- Measurement of two flows simultaneously

FEATURES

- Dual flow monitoring with *sum*, *average*,
difference and *maximum* calculations
- Process output options including current,
open-collector, relay
- Communication options RS 485, Modbus RTU,
Profibus PA and HART* compatible output
- Current inputs for temperature, pressure
and density compensation
- Large data logger and software for sampling
and data transfer
- Optional heat quantity (thermal energy)
measurement functionality

APPLICATIONS

- Heating, Ventilation and Air Conditioning
(HVAC) measurements
- Large pipe measurement with two
sensor pairs in 'X' configuration
- Product recognition and interface
detection systems
- ATEX measurements with Ex-certified
transducers
- Effluent and wastewater measurements
- Automated process control

* HART® is a registered trademark of the
HART Communication Foundation




KATflow 170

Clamp-On ATEX Ultrasonic Flowmeter



Programming of the KATflow 170 is conveniently carried out through the glass-fronted housing using a magnet. The K1Ex transducers are IP 68 certified as standard.

RUGGED. RESISTANT. RELIABLE.



For applications where harsh environmental conditions demand a more rugged instrument, the KATflow 170 provides a corrosion-resistant option as part of a fully ATEX-certified package. The flowmeter is intended for permanent operation in Zone 1 and 2

hazardous areas and is an economical choice for a variety of metering applications. The KATflow 170 demonstrates that even the most complex technical requirements can be met with straightforward solutions.

Fixed
Installation

-50°C +115°C



SPECIFICATION

- Pipe diameter range 10 mm to 3,000 mm
- Temperature range for sensors
-50 °C to +115 °C (-58 °F to +239 °F), higher temperatures available on request
- Robust IP 66 unit with LCD display and glass-fronted keypad
- Epoxy-coated aluminium or stainless steel enclosure
- Magnetic pen for safe and easy programming
- Measurement of two flows simultaneously

FEATURES

- Suitable for installation in hazardous areas
- Dual flow monitoring with *sum*, *average*, *difference* and *maximum* calculations
- IP 68 stainless steel sensors as standard
- Process output options including current, open-collector, relay
- Communication options RS 485, Modbus RTU, Profibus PA and HART* compatible output
- ATEX-certified PT100 probe for temperature compensation

APPLICATIONS

- Produced water measurements
- Methanol and water injection systems
- Product recognition and interface detection systems
- Measurement of refined products
- Tanker unloading systems
- Oil blending skids

* HART® is a registered trademark of the
HART Communication Foundation





As Ireland's official distributor for Grohe, Modern Plant stock-holds and displays a large range of Grohe Commercial and Domestic products including showers, taps, frames and accessories.

GROHE



Modern Plant Ltd are an official stocking distribution centre for Emerson Rosemount industrial flow, level, pressure, analytical and temperature instrumentation products.

EMERSON
Process Management



Modern Plant Ltd offer a wide range of Stiebel Eltron products, from instantaneous hot water heating, stored water and electric space heating solutions.

STIEBEL ELTRON
Comfort through technology



We are one of Ireland's leading suppliers of Stuart Turner pumps to suit a variety of water boosting and water transfer applications across multiple market sectors.

STUART TURNER
ENGINEERED TO EXCEL



Modern Plant Ltd are official stocking distributors for the full range of SMC products and have a wide range of parts available from our trade counter.

SMC



Modern Plant Ltd is the sole Irish distributor for the complete Medem gas safety product range. Both companies work closely to ensure the products remain best in class.

medem



We stock a comprehensive range of Haws AG emergency equipment. We also supply special models to the highest level of quality as well as attractive, stylish drinking fountains and water coolers.

Haws
Switzerland



We are the official Irish distributor for all Metso Automation valve and control products, including NELES branded flanged ball valves, rotary plug valves, segment valves, high performance off-set butterfly valves, valve actuators and much more.

metso



We stock a large range of Bobrick washroom accessories made from type 304 stainless steel... the material of choice and quality for public washrooms.

BOBRICK



We stock Bonfiglioli power transmission and control products, providing automation solutions for all areas of industry including the packaging, beverage, textile, food, ceramic, wood, mining and metal processing industries.

Bonfiglioli
power, control and green solutions



We stock tapware and shower solutions for commercial changing facilities, toilets and accessibility to people with reduced mobility in collective facilities. High tech solutions for healthcare, elderly care and laboratories.

PRESTO



AMG specialise in quarter turn rack and pinion pneumatic actuators with many available from stock held locally in Modern Plant.

AMG



MODERN PLANT For more information call 00353 1 461 4300

Modern Plant Limited, Otter House, Naas Road, Clondalkin, D 22

E: sales @ modernplant.ie, W: www.modernplant.ie